


The Optima is a modular aluminium-based workstation power outlet system. These units can be customised according to the number of power, voice/data, switches and protection devices (fuses, circuit breakers, filters etc) the client requires, as well as the bespoke layout and configuration. The housing is also available in a variety of finishes and colours. The Optima can be supplied with many different mounting options including desk mounted, vertical, L-Brackets and customised clips.

As with the Oblique range, the Optima is available in a dual-power and a power protected format. In addition, the Optima can be supplied as a dual-voltage system, supplying both 115V and 240V. All units are available in a variety of finishes, including various anodised and epoxy powder coated shades.

Features

- Available with modular protection modules (power filters, circuit breakers, earth leakage devices) ●
- Modular - any combination of power and/or communication outlets available ●
- Up to 30 different International Socket types can be fitted to these units ●
- The selection of 23 different angles of orientation of each socket (certain local regulations limit options in some instances) ●
- Can be supplied with two or more circuits in one unit ●
- Hybrid power (power and data in one unit) ●
- Numerous mounting options: ●
- Robust aluminium housing ●

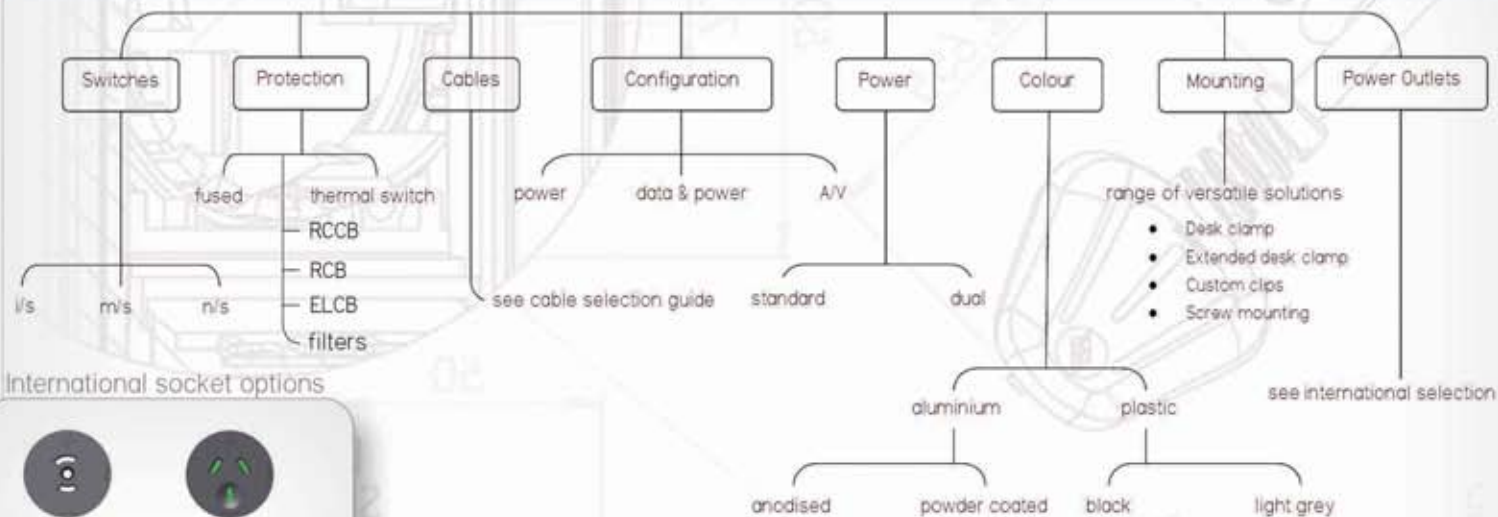

International socket options



robust aluminium extrusion

45° mounting angle

desk clamp mounting

selection of international plugs or connectors available

cable strain relief

selection of international sockets available

optional fuse

USB data port

Dimensions

Length: variable (depending on configuration chosen)

Width: 65mm (2.56")

Height: 50mm (1.96")

Electrical

Operating Voltage: *110V - 250V AC 50/60 Hz

Current: *15-20A

Max Power: *1500 - 4800 W

*Local electrical regulations determine electrical rating of the system